


TOP VIEW

STREET ELEVATION

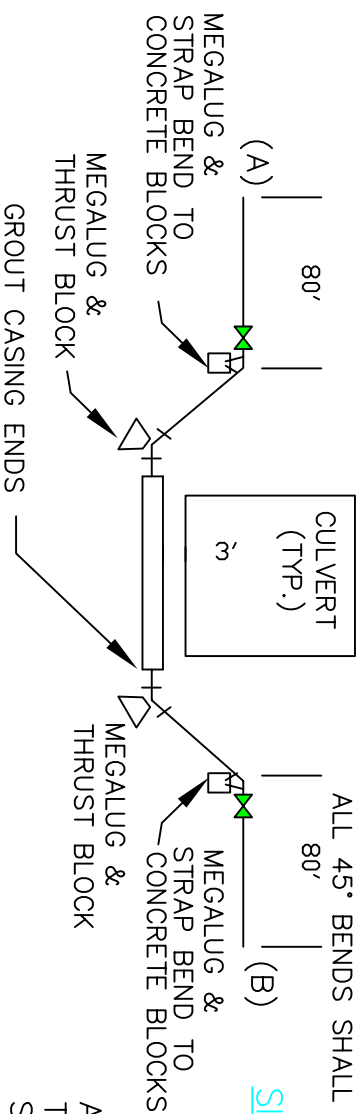

SIDE VIEW

ALL 45° BENDS SHALL BE ROLLED TO ACHIEVE 5' HORIZONTAL OFF SET

ALL JOINTS BETWEEN POINT (A) & POINT (B) TO BE MEGALUG MECHANICALLY RESTRAINED JOINTS. SEE SECTION 02224 PART 2 2.04 FOR INSIDE CASING.

SCALE: NONE

1	RSS	UPDATE REVIEWED	12/21/99 2004	
1				
NO.	AUTHORIZED BY	REVISIONS	DATE	<p>STANDARD DETAIL</p> <p>FIGURE_6-1</p> <p>CASING CARRIER PIPE TYPICAL INSTALLATION</p>